

S402

Fingerprint Standalone Access Control



- รองรับระบบการเปิด-ปิด ประตู
- รองรับ 3,000 ลายนิ้วมือ
- สามารถรองรับการ์ดได้ 5,000 ใบ
- จัดจำข้อมูลสูงสุด 30,000 ข้อมูล
- RS232/485, TCP/IP, USB-host
- จอ TFT LCD Screen

S402 is an innovative biometric fingerprint reader for access control applications, offering unparalleled performance using an advanced algorithm for reliability, precision and excellent matching speed. The F18 features the fastest commercial-based fingerprint matching algorithm and ZK high-performance, high-image quality optical fingerprint sensor. The device offers the flexibility to be installed standalone or with any third party panel that supports 26-bit Wiegand. All the operation can be done on the TFT-LCD. The fingerprint image will display on the screen. That will guide the user to put the finger on to proper position and increase the recognition rate.


TCP/IP and RS485 are available that the device can be used in different network.



SECURITY TECHNOLOGY SOLUTION



Connection Diagram:

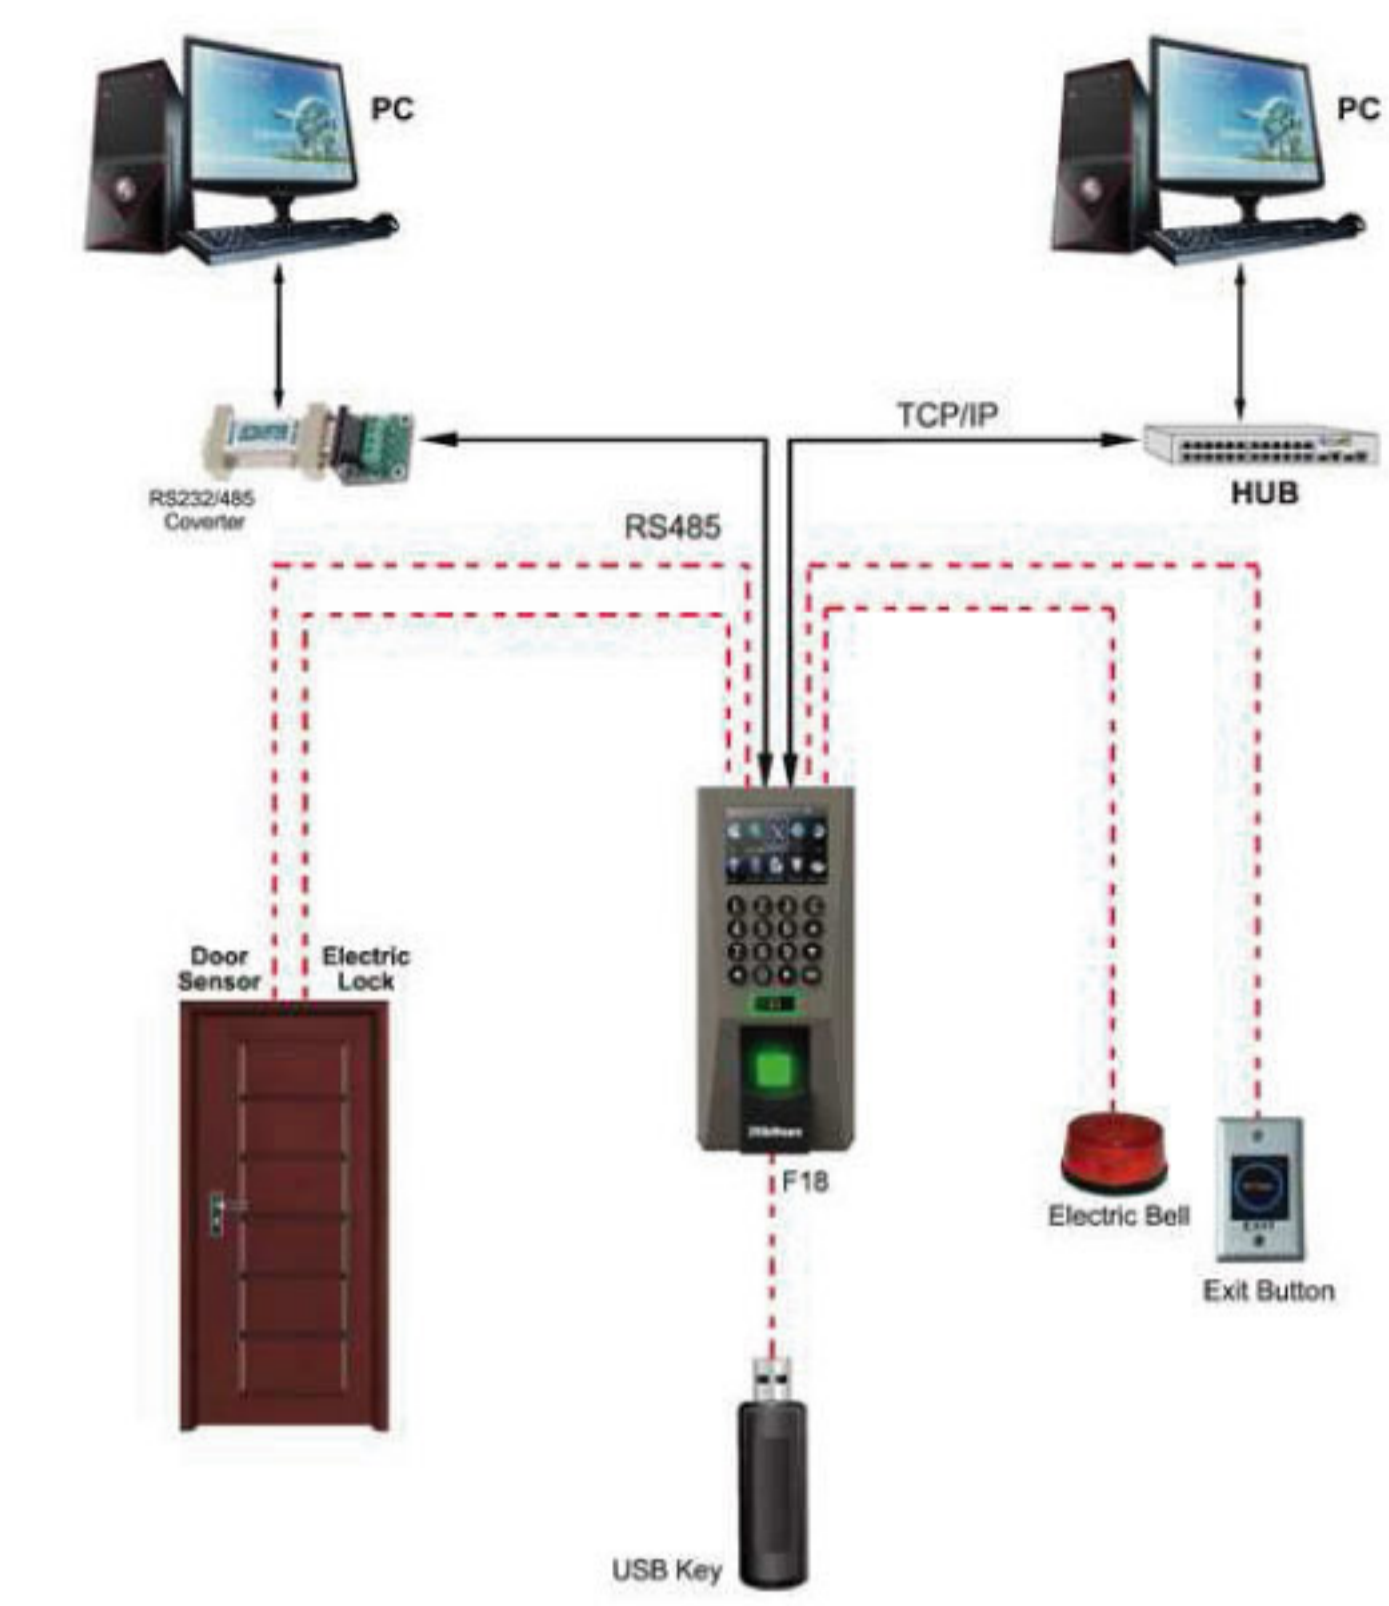

Features:

- 1 touch a-second user recognition
- Fingerprint reader with durable and highly accurate ZK optical sensor
- Stores 1,500 templates, 5,000 cards and 30,000 transactions
- Reads Fingerprint and/or Card
- Optional integrated smart card reader
- Built-in Serial and Ethernet ports
- Tamper-proofs switch and alarm outputs
- Request-to-exit and alarm contacts
- Audio-Visual indications for acceptance and rejection of valid/invalid fingers

Specifications:

Fingerprint Capacity	3,000 templates
ID card Capacity	5,000
Transaction Capacity	30,000
Sensor	ZK Optical Sensor
Algorithm Version	ZK Finger v10.0
Communication	RS232/485, TCP/IP, USB-host
Access Control Interface for	3rd party electric lock, door sensor, exit button, alarm, Door Bell
Wiegand Signal	Output and Input
Display	TFT LCD Screen
Standard function	ID card, Webserver, DLST
Optional function	Mifare card
Power Supply	12V DC
Operating Temperature	0°C- 45°C
Operating Humidity	20%-80%

