

Fingerscan Time Attendance System

เครื่องบันทึกเวลาการทำงาน




SU300-C

- ▶ จอสี TFT ขนาด 3 นิ้ว
- ▶ ID/Mifare/HID (ฟังก์ชั่นเสริม)
- ▶ เก็บลายนิ้วมือได้ 3,000 ลายนิ้วมือ
- ▶ บันทึกข้อมูลได้ 100,000 รายการ
- ▶ สามารถกำหนดวันหมดอายุของลายนิ้วมือ
- ▶ เชื่อมต่อแบบ TCP/IP, USB Client, USB Host
- ▶ สามารถแสดงรูปพนักงานขณะสแกนนิ้ว

The firmware of SU300-C has been upgraded to the New Firmware. It brings many new experiences, including the new stunning GUI, rock-solid stability, faster matching speed and better expandability. The SU300-C features the fastest commercial-based fingerprint matching algorithm and ZK high-performance, high-image quality optical fingerprint sensor. The 3" TFT can display more information vividly, including fingerprint image quality and verification result etc. TCP/IP communication is standard and make sure the data transmission between terminal and PC can be easily done within several seconds.



Connection Diagram:

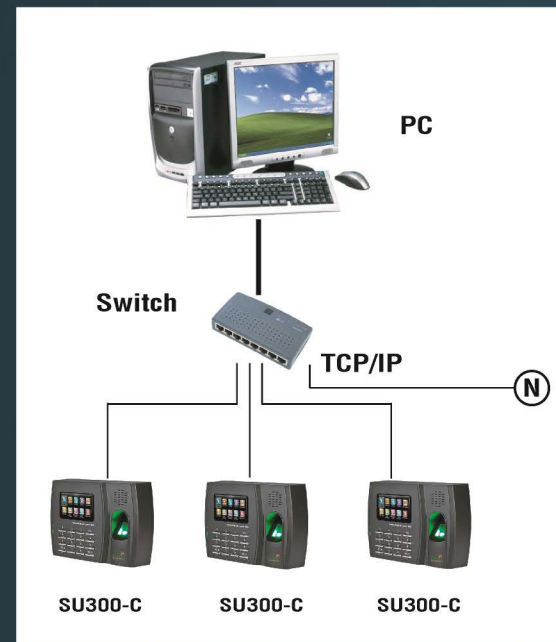

Features:

- Color TFT screen with GUI Interface for ease of use
- User validity settings.
- 1 touch a-second user recognition
- Stores 3,000 templates and 100,000 transactions
- Data backup and retrieve.
- Optional integrated proximity or Mifare/HID card reader
- Built-in Ethernet ports
- Built-in USB port allows for manual data transfer when network isn't available
- Advanced User ID consisted of letters and numbers.
- Built in bell scheduling
- Real-time 1-touch data export 3rd party hosted & non-hosted applications
- Audio-Visual indications for acceptance and rejection of valid/invalid fingers
- SDK available for OEM customers and software developers

Specifications:

Fingerprint Capacity	3,000 templates
Transaction Capacity	100,000
ID Card Capacity	10,000 (Optional)
Hardware Platform	ZMM100
Algorithm Version	ZK Finger v10.0 / v9.0
Communication	TCP/IP,USB-host, USB-client
Standard Functions	SMS, Workcode, DLST, Scheduled-bell, Self-Service Query, Automatic Status Switch
Optional Functions	ID/Mifare/HID, Webserver, ADMS
Display	3 inches TFT Screen
Verification Speed	Less than or Equa to 0.5 Sec.
Operating Temperature	0°C - 45 °C
Operating Humidity	20%-80%
Dimension	181.6X129X49 mm
Net Weight	1.2 kg

